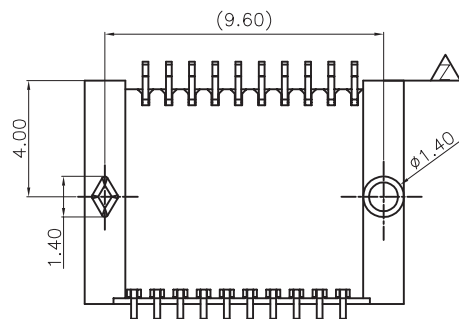
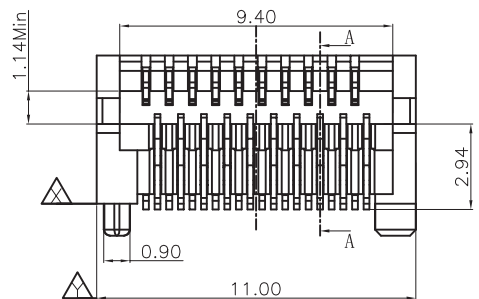
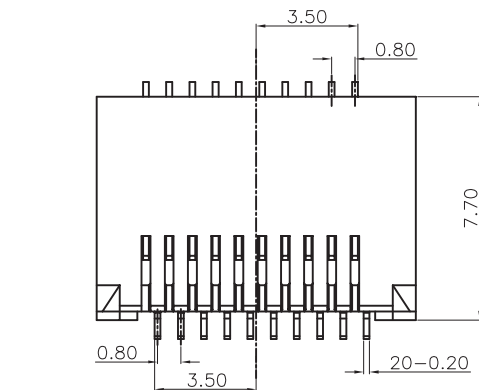


A-A !

NOTE:


MATERIAL:

1. TERMINAL: PHOSPHOR BRONZE
2. HOUSING: LCP UL 94V-0. COLOR: BLACK
3. 0.38um OR 0.76um MIN. GOLD PLATING ON CONTACT AREA.

MECHANICAL REQUIREMENT:

1. DURABILITY: 100 CYCLES MIN.
2. INSERTION AND EXTRACTION FORCE: 40N MAX & 11.5N MAX
3. CURRENT RATING: 0.5 Amps Max.

4. CONTACT RESISTANCE: 30 MILLIOHMS MAX INITIAL.
5. DIELECTRIC WITHSTANDING VOLTAGE: 300V AC/MIN.
6. WORKING VOLTAGE: 30V AC/DC MAX
7. OPERATION: -40°C~+85°C.
8. STORAGE: -55°C~+105°C.
9. REFLOW SOLDERING TEMPERATURE: 255~265° MAXIMUM FOR 40~60 SECONDS.
10. ROHS COMPLIANT

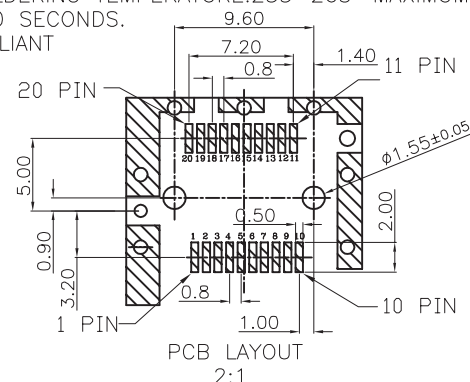

RoHS Compliant

沃虎 苏州沃虎电子科技有限公司
VOOHU Su Zhou Voohu Electronic Tech.Co.Ltd

TITLE: SFP+ 1×1 CONNECTOR

SIZE

UNITS
MM[INCH]

GENERAL TOLERANCES
UNLESS SPECIFIED

APPROVED BY:
Geoffrey. Song

PART NO.:

WHSFP10511D001

SACLE
1:1

REV
A0


$x \pm 0.35$
 $x \pm 0.30$

$x^\circ \pm 3.0^\circ$
 $x^\circ \pm 2.0^\circ$

CHECKED BY:
Elvis. Song

REMARK:

SHEET
1/4



$.xx \pm 0.25$
 $.xxx \pm 0.10$

$.xx^\circ \pm 1.5^\circ$
 $.xxx^\circ \pm 1.0^\circ$

DESIGND BY:
Sunny. Xu

TEL: +86 400 1048 018

WEB: WWW.WOHU-TEK.COM