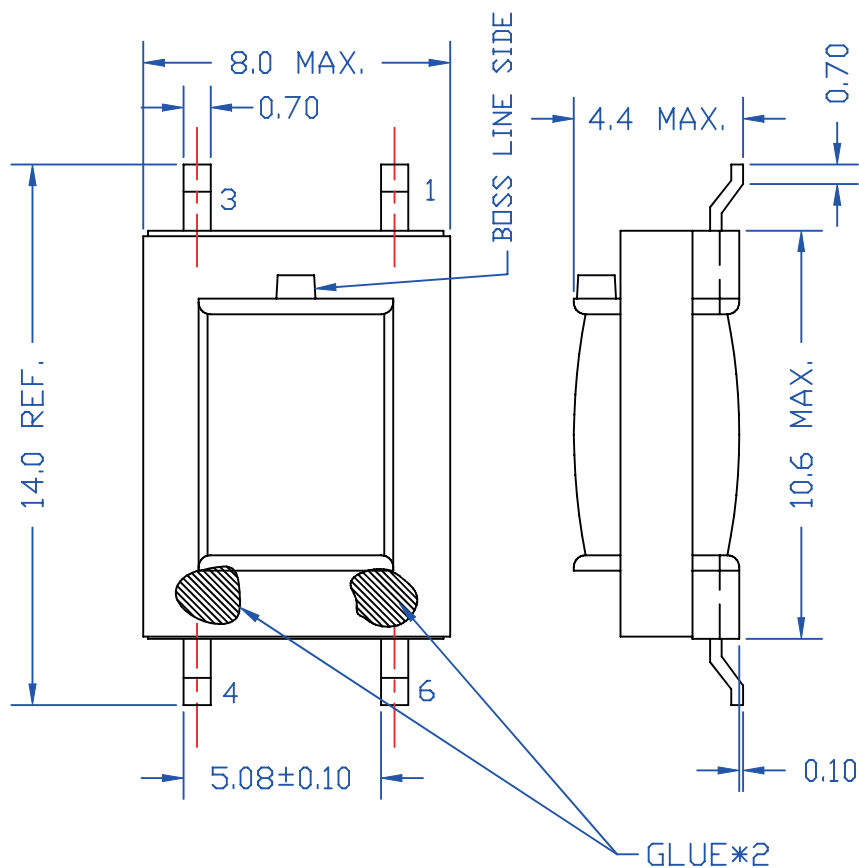


ELECTRICAL CHARACTERISTICS:

- D. C. R. PIN 1-3 = 105 OHM +/-10% PIN 4-6 = 105 OHM +/-10%
- INDUCTANCE (@ 250HZ, 0.5Vrms, PARALLEL) 1-3 = 3 H MIN
- IMPEDANCE (@ 1KHZ, 0dBm, 6-4 W/H 400 OHM)
 - 1-3 = 600 OHM+/-3%
- INSERTION LOSS = 2.3 dB MAX.
 - (@ 1KHZ, 0dBm, W/H 400 OHM LOAD)
- FREQ, RESP, (@ 300HZ TO 4KHZ, REF. 1KHZ) = +/-0.12dB
- RETURN LOSS: @300HZ = 28dB MIN, @1KHZ = 35dB MIN.
 - @4KHZ = 35dB MIN.
- TURN RATIO : 1-3:6-4 = 1 +/-1%
- HI-POT = 1250 VAC, 1mA, 2SEC. (PRI. -SEC.)

VOOHU 苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd

TITLE: 600 : 400
TRANSFORMER

PART NO.:
ATC-05-042AR

REMARK:


SIZE
A4

SACLE
1:1

SHEET
1/1

UNITS
MM[INCH]

REV
A0



GENERAL TOLERANCES
UNLESS SPECIFIED

x±0.35
.x±0.30
.xx±0.25
.xxx±0.10

x°±3.0°
.x°±2.0°
.xx°±1.5°
.xxx°±1.0°

APPROVED BY:
Geoffrey.Song

CHECKED BY:
Elvis.Song

DESIGND BY:
Sunny.Xu

TEL: +86 400 1048 018

WEB: WWW.WOHU-TEK.COM