



F



F



E




C



A


1

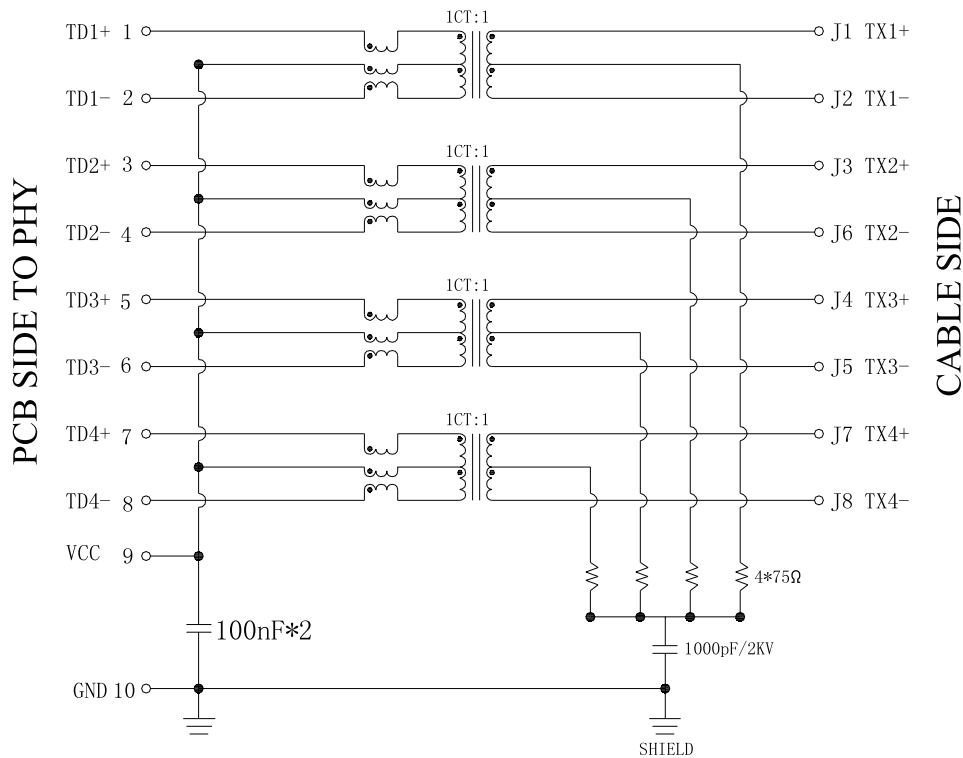

Electrical:

- Turn ratio: 1~2: J1~J2=1CT:1CT($\pm 2\%$).
3~4: J3~J6=1CT:1CT($\pm 2\%$).
5~6: J4~J5=1CT:1CT($\pm 2\%$).
7~8: J7~J8=1CT:1CT($\pm 2\%$).
- OCL: 350uH Min.at 100KHz 100mV 8mA DC.
- Insertion Loss: -1.0 dB Max 1~100MHz.
- Return loss: -18dB Min 1~30MHz;
-14dB Min 30~60MHz.
-12dB Min 60~80MHz.
-10dB Min 80~100MHz.
- Cross talk: -40dB Min 1~30MHz;
-35dB Min 30~60MHz;
-30dB Min 60~100MHz;
- CMR: -30dB Min 1~100MHz;
- Hi-Pot: 1200V DC 6S 1mA PRI TO SEC

PROFILE OF WAVE SOLDER

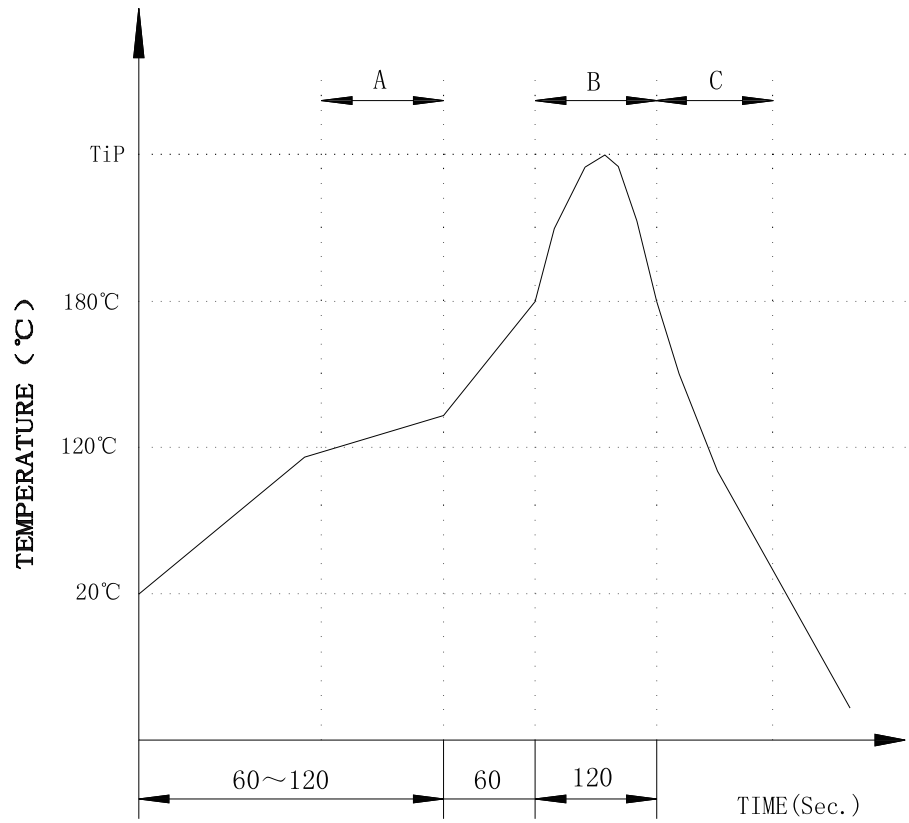

 苏州沃虎电子科技有限公司 Su Zhou Voohu Electronic Tech.Co.Ltd	TITLE: RJ45 2X6 1000BASE		SIZE A4	UNITS MM[INCH]	GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY: Geoffrey.Song
	PART NO.: SYT26Q366HWA2D057		SACLE 1:1	REV A0	$x \pm 0.35$ $.x \pm 0.30$	$x^{\circ} \pm 3.0^{\circ}$ $.x^{\circ} \pm 2.0^{\circ}$	CHECKED BY: Elvis.Song
	REMARK:		SHEET 3/3		$.xx \pm 0.25$ $.xxx \pm 0.10$	$.xx^{\circ} \pm 1.5^{\circ}$ $.xxx^{\circ} \pm 1.0^{\circ}$	DESIGND BY: Sunny.Xu