



1	
REACH & RoHS COMPLIANT	

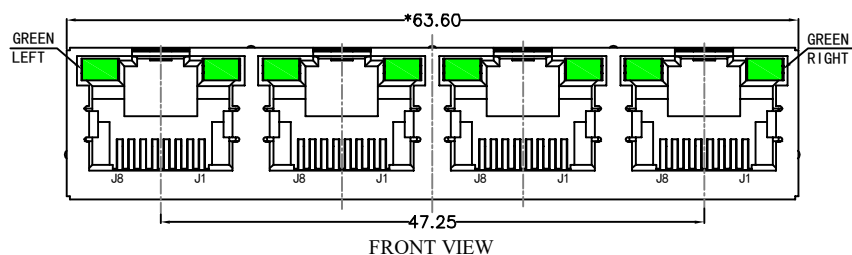

MATERIAL:



HOUSING: PBT,UL94V-0,BLACK.
 TERMINAL: PHOSPHOR BRONZE T=0.35MM,
 G/FU" GOLD PLATING ON CONTACT AREA.
 SHIELD: C2680,T=0.20MM,20 MIN NICKEL PLATING
 ON ALL AREA.

MACHANICAL:


DURABILITY: 750 CYCLES MIN.
MATING/UNMATING FORCE: 30N MAX.
RETENTION STRENGTH : 50N FOR 60±5 S.
OPERATING TEMPERATURE: -40°C~+85°C.
STORAGE TEMPERATURE: -40°C~+85°C.
ALL CRITICAL DIMENSIONS WITH "±"

ELECTRICAL:

VOLTAGE: 150 VOLTS AC.
CURRENT RATING : 1.5AMP.
INSULATION RESISTANCE: 1000 MEGA OHMS MIN.@500VDC.
CONTACT RESISTANCE: 20 MEGA OHMS MAX.

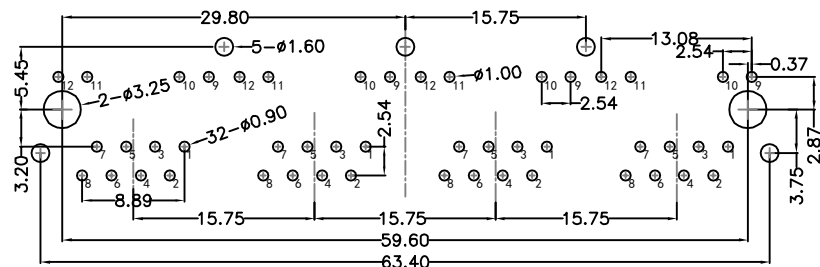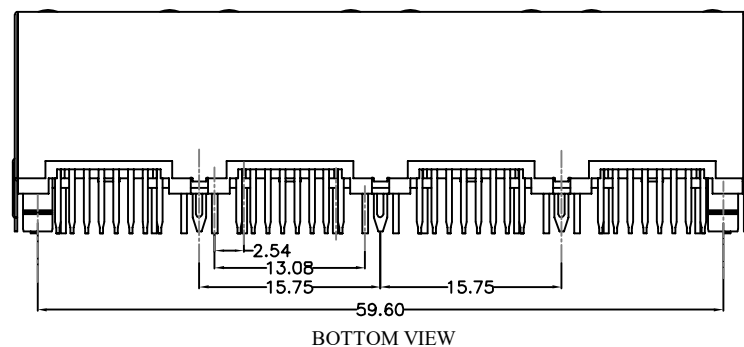


RECOMMENDED PCB LAYOUT
VIEWED FROM COMPONENT SIDE

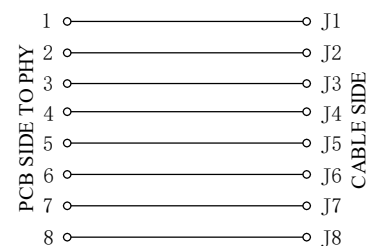

LED Specification

Standard LED Color	LED Wavelength	Foward(A)	Foward(V)
Green	568nm	20mA	1.85-2.45



TITLE:	180° TAB-UP 1*4
--------	-----------------

PART NO.:
SYT52T1488AB3A1D10B1057

REMARK:

SIZE	UNITS
A4	MM[INCH]

SACLE	REV
1:1	A0

SHEET
1/1



GENERAL TOLERANCES
UNLESS SPECIFIED

$x \pm 0.35$	$x^\circ \pm 3.0^\circ$
$.x \pm 0.30$	$.x^\circ \pm 2.0^\circ$
$.xx \pm 0.25$	$.xx^\circ \pm 1.5^\circ$
$.xxx \pm 0.10$	$.xxx^\circ \pm 1.0^\circ$

APPROVED BY:
Geoffrey.Song

CHECKED BY:	Elvis Song
-------------	------------

DESIGND BY:
Sunny.Xu

TEL: +86 400 1048 018

WEB: WWW.WOHU-TEK.COM