




TERMINAL: PHOSPHOR BRONZE C5210,T=0.35MM,
50U" GOLD PLATING ON CONTACT AREA.


ALL CRITICAL DIMENSIONS WITH "*"

.xx°±1.5°	DESIGND BY: Sunny Xu
.xxx°±1.0°	

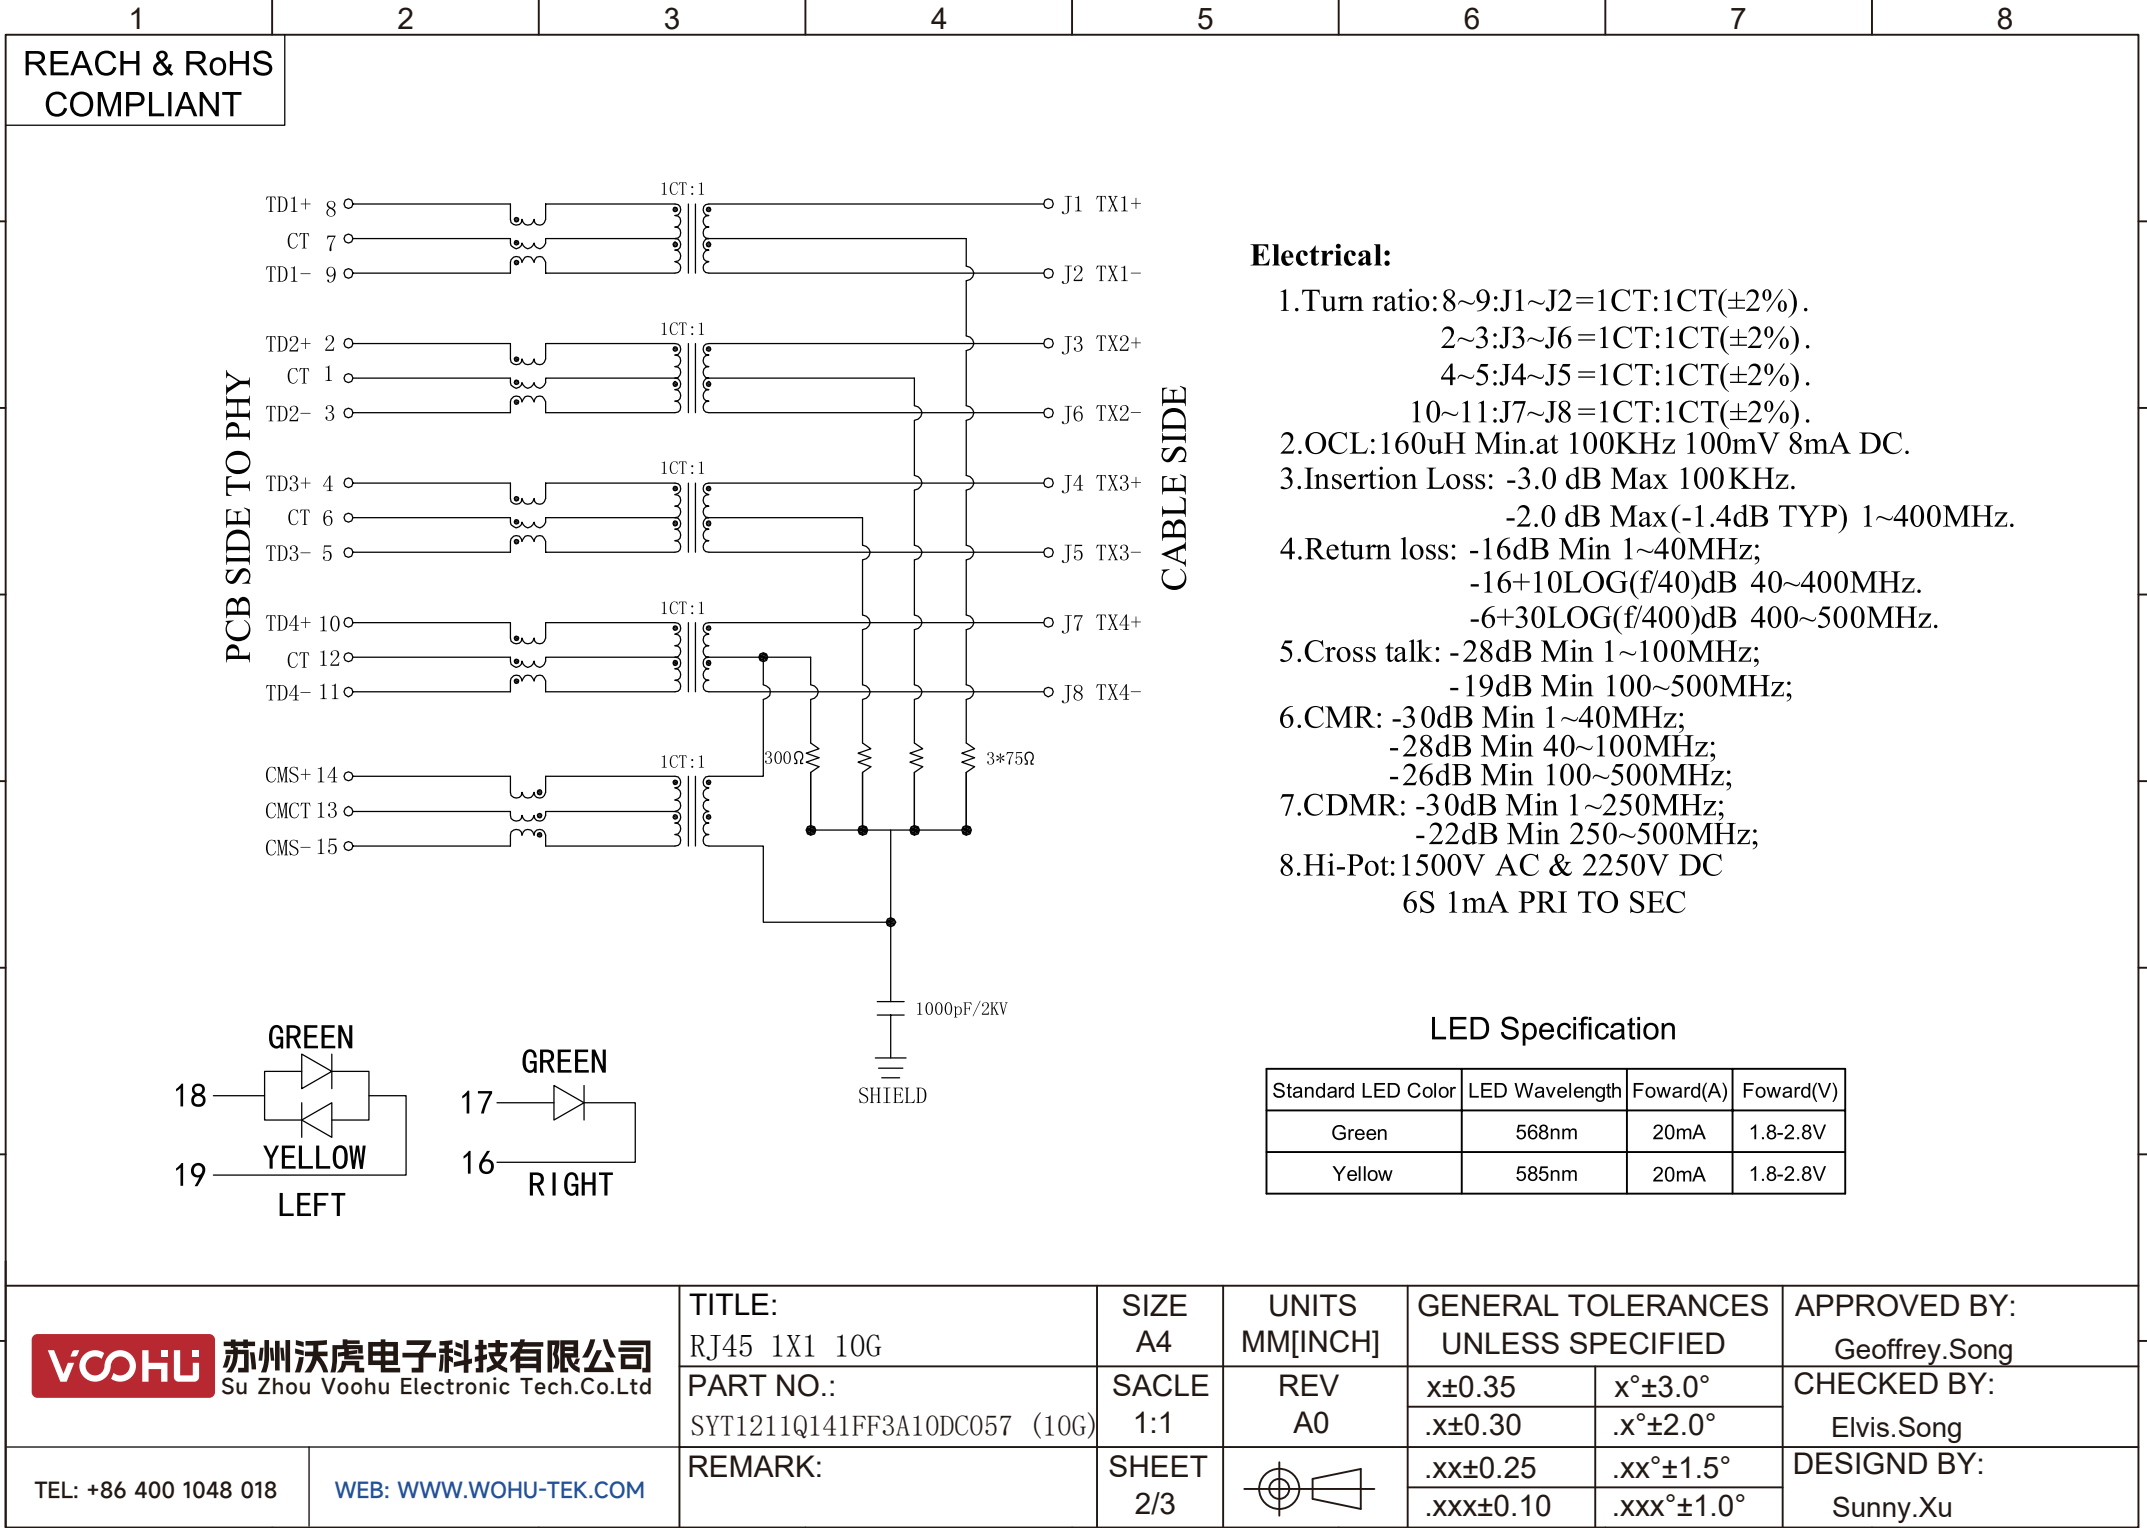

REACH & RoHS
COMPLIANT

PROFILE OF WAVE SOLDER

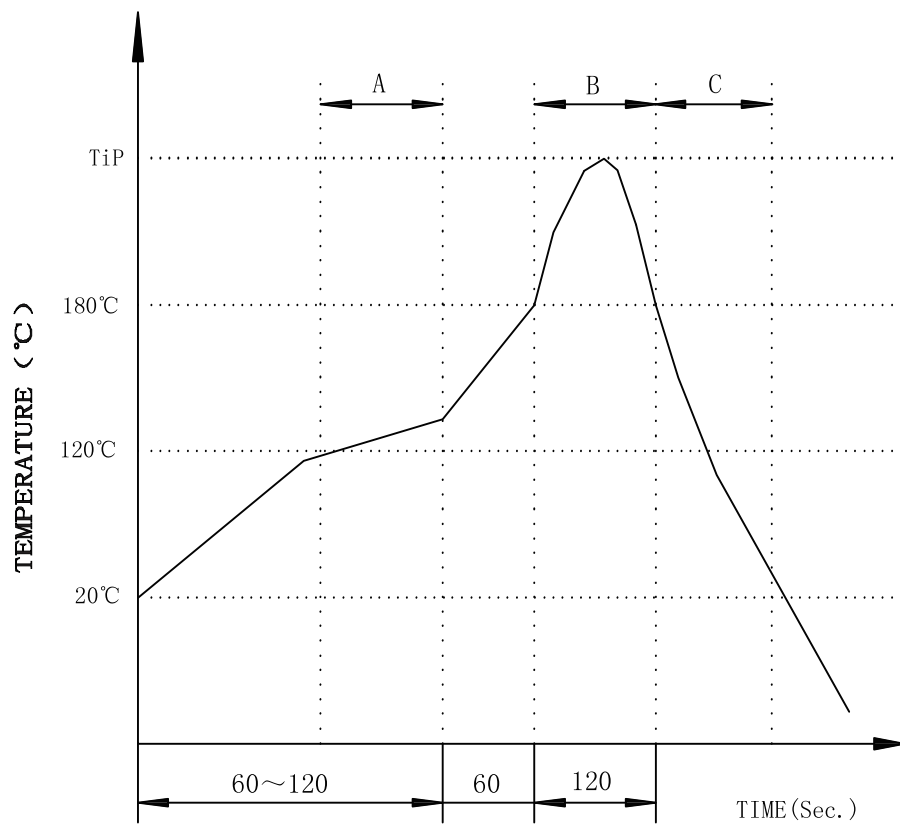

A.Preheating B.Soldering C.Gradual Cooling
Tip temperature:260±5°C.
Tip temperature time:5Sec Max.
Tip melting point of Sn96.5/Ag3/Cu0.5:217°C.

Remarks: after wave soldering, the plastic
positioning columns of the product which under the
PCB will be slightly melted, but it won't affect its
function.

VOOHU 苏州沃虎电子科技有限公司 Su Zhou Voohu Electronic Tech.Co.Ltd	TITLE:		SIZE	UNITS	GENERAL TOLERANCES		APPROVED BY:
	RJ45 1X1 10G		A4	MM[INCH]	UNLESS SPECIFIED		Geoffrey.Song
	PART NO.:		SACLE	REV	x±0.35	x°±3.0°	CHECKED BY:
TEL: +86 400 1048 018	SYT1211Q141FF3A10DC057 (10G)		1:1	A0	.x±0.30	.x°±2.0°	Elvis.Song
	REMARK:		SHEET		.xx±0.25	.xx°±1.5°	DESIGND BY:
	WEB: WWW.WOHU-TEK.COM		3/3		.xxx±0.10	.xxx°±1.0°	Sunny.Xu