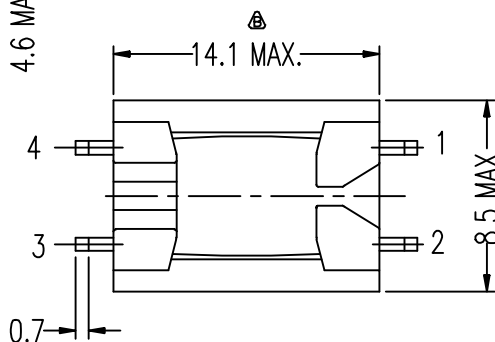
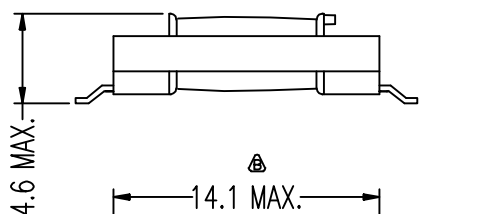
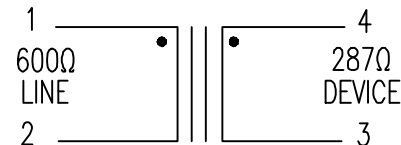
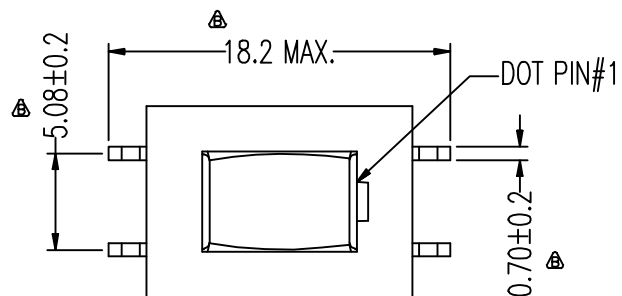


ELECTRICAL CHARACTERISTICS: (FOR V.90, MEET UL1950)

- DCR : PIN 1-2 = 180Ω MAX. PIN 3-4 = 160Ω MAX.
- INDUCTANCE (@1KHz, 1Vrms, LP.) : PIN 1-2 = 1.6Hy MIN.
- INSERTION LOSS (@1KHz, 0dBm, PIN 3-4 W/H 287Ω)
PIN 1-2 = 3.5 dB MAX.
- FREQ. RESP.(REF. 1KHz) : @200Hz-5KHz = ± 0.3dB
- RETURN LOSS (REF. 600Ω) : @300Hz - 3500Hz = 20dB MIN.
- TURNS RATIO(@15KHz,1Vrms) : PIN 1-2 : PIN4-3 = 1 ± 1%
- LONGITUDINAL BAL. = 60dB MIN.(@200-4KHz)
- T.H.D.(@600Hz,-10dBm) = -75dB MAX.
- HI-POT (@1650VAC. 1mA. 2SEC.) PRI.-SEC.
- RoHS COMPLIANC.

VOOHU 苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd

TITLE:
TRANSFORMER

SIZE
A4

UNITS
MM[INCH]

GENERAL TOLERANCES
UNLESS SPECIFIED

APPROVED BY:
Geoffrey.Song

PART NO.:
WHTT4202

SACLE
1:1

REV
A0

x±0.35
.x±0.30

x°±3.0°
.x°±2.0°


CHECKED BY:
Elvis.Song

TEL: +86 400 1048 018

WEB: WWW.WOHU-TEK.COM

REMARK:

SHEET
1/1



.xx±0.25
.xxx±0.10

.xx°±1.5°
.xxx°±1.0°

DESIGND BY:
Sunny.Xu