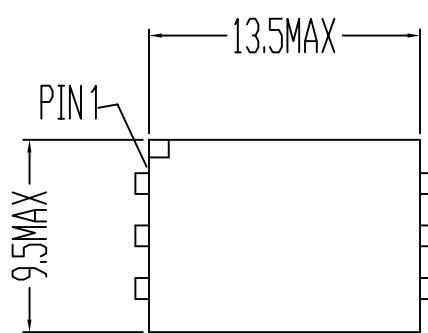
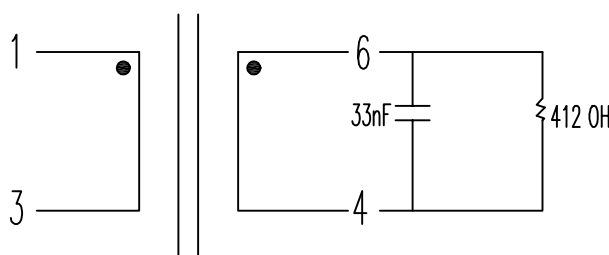
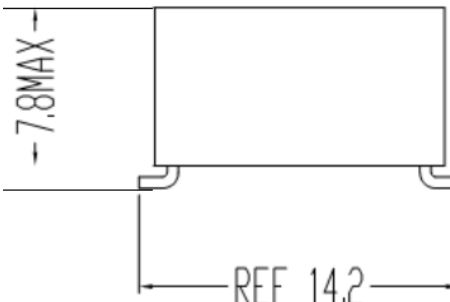
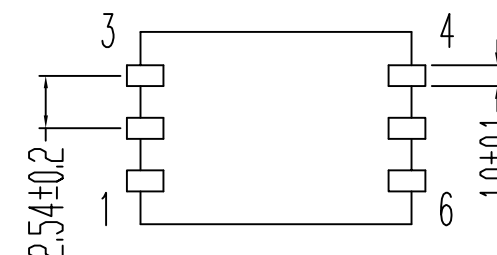


1	2	3	4	5	6	7	8				
REACH & RoHS COMPLIANT											
				ELECTRICAL CHARATERISTICS: 1.DCR:PIN1-3=115 OHM±15%, PIN4-6=115 OHM±15%, 2.INDUCTANCE PARALLEL:200Hz,0.78V PIN1-3=3.8H MIN RESISTANCE PARALLEL 7500 OHM MIN 3.LEAKAGE INDUCTANCE:1KHz,0.1V PIN1-3(4-6short)=6 mH TYP 4.INSERTION LOSS:2KHz,0dB PIN1-3(4-6 W/H 412 OHM)=2dB MAX 5.RETURN LOSS:REF 600 OHM FROM 200Hz~4Hz=24dB MIN 6.TURN RATIO:15KHz,1V PIN1-3:6-4=1±1% 7.FREQ RESP:REF 2KHZ FROM 200HZ~4KHZ=±0.25dB 8.INSULATION RESISTANCE 100M OHM MIN@500VDC 9.HI-POT: 4600vAC 1mA 60SEC:P-S 10.ROHS COMPLIANT							
											
 苏州沃虎电子科技有限公司 Su Zhou Voohu Electronic Tech.Co.Ltd		TITLE: Transformer 600:412		SIZE A4	UNITS MM[INCH]		GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY: Geoffrey.Song		
		PART NO.: WHTT6010		SCALE 1:1	REV A0		x±0.35	x°±3.0°	CHECKED BY: Elvis.Song		
		REMARK:		SHEET 1/1			.xx±0.25	.xx°±1.5°	DESIGNED BY: Sunny.Xu		
TEL: +86 400 1048 018		WEB: WWW.WOHU-TEK.COM									