

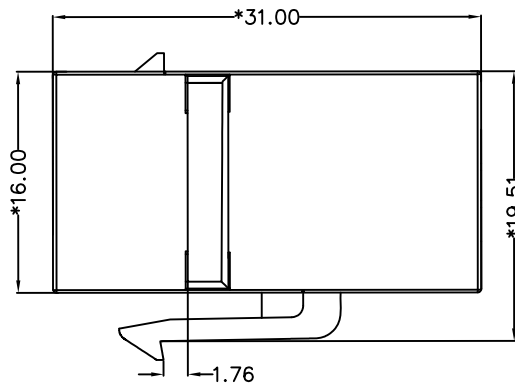


1	2	3	4	5	6	7	8		
REACH & RoHS COMPLIANT						REV.	ECN / DESCRIPTION	BY	DATE
						A0	NEW	Sunny.Xu	2018.06.30

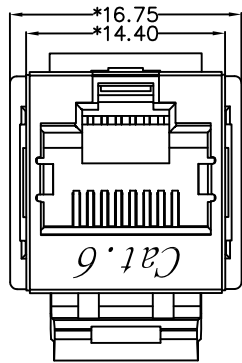

MATERIAL:


HOUSING: ABS,UL94V-0 .
TERMINAL: PHOSPHOR BRONZE T=0.35MM,
50U" GOLD PLATING ON CONTACT AREA.
SHIELD: C2680,T=0.20MM,20 MIN NICKEL PLATING
ON ALL AREA.


MACHANICAL:

DURABILITY: 750 CYCLES MIN,12.5MM/MINUTE.
OPERATING TEMPERATURE: -40℃~+85℃.
STORAGE TEMPERATURE: -40℃~+85℃.
ALL CRITICAL DIMENSIONS WITH "±0.11"

ELECTRICAL:

VOLTAGE: 125 VOLTS AC.
CURRENT RATING : 1.5AMP.
DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ,1MIN.
INSULATION RESISTANCE: 500 MEGA OHMS MIN @ 500V DC.
CONTACT RESISTANCE: 30 MILLIOHMS MAX.

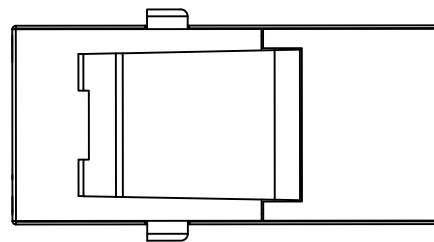

 苏州沃虎电子科技有限公司 Su Zhou Voohu Electronic Tech.Co.Ltd			TITLE: RJ45屏蔽直通模块		SIZE A4	UNITS MM[INCH]	GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY: Geoffrey.Song	
			PART NO.: SYT-US030-026E-L		SCALE 1:1	REV A0	± 0.35	$\pm 3.0^\circ$	CHECKED BY: Elvis.Song	
TEL: +86 400 1048 018 WEB: WWW.WOHU-TEK.COM			REMARK:		SHEET 1/1		± 0.25	$\pm 1.5^\circ$	DESIGNED BY: Sunny.Xu	
							± 0.10	$\pm 1.0^\circ$		