






REACH & RoHS
COMPLIANT

WH59B32887121101

CONTACTS (金针根数):
8-8CONTACTS (8C)
LED STYLE (LED 颜色类型):
7-L LED: GREEN+RED,
R LED: GREEN+RED (左绿/红右绿/红)
PLASTIC (塑料):
1-PBT;
3-NYLON46 (尼龙46)
COLOR (颜色):
1-BLACK (黑色)
GOLD PLATING (镀金厚度):
1-FU"; 2-1.5U"; 3-3U"; 4-6U";
5-15U"; 6-30U"; 7-50U"

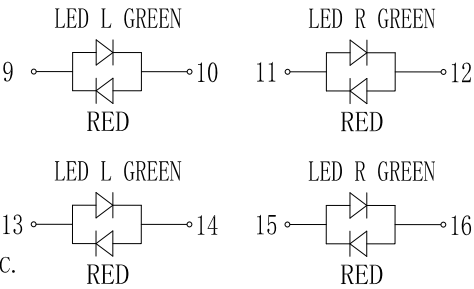

NOTES:
ELECTRICAL:
1. VOLTAGE RATING: 125V AC.
2. CURRENT RATING: 1.5A.
3. CONTACT RESISTANCE: 30 mΩ MAX.
4. INSULATION RESISTANCE: 500 MΩ MIN @ 500V DC.
5. DIELECTRIC STRENGTH: 1000V AC 50Hz or 60Hz, 1MIN.
MECHANICAL:
1. INSERT MATERIAL: UL94V-0.
2. CONTACT MATERIAL: 00.46mm C51000 (QSn4-0.3) PHOSPHOR
BRONZE GOLD PLATING OVER NICKEL.
3. SHIELD: 0.20mm THICKNESS H65Y BRASS NICKEL PLATED.
4. MATING/UNMATING FORCE: 20N Max.
5. RETENTION STRENGTH: 50N pendant 60±5s.
6. OPERATING LIFE: 750 CYCLES MIN.
ENVIRONMENTAL:
1. STORAGE: -40℃ ~ +85℃ RELATIVE HUMIDITY<70%.
2. OPERATION: -40℃ ~ +85℃.

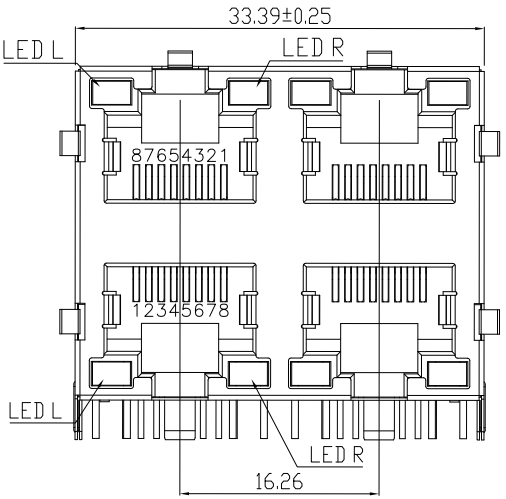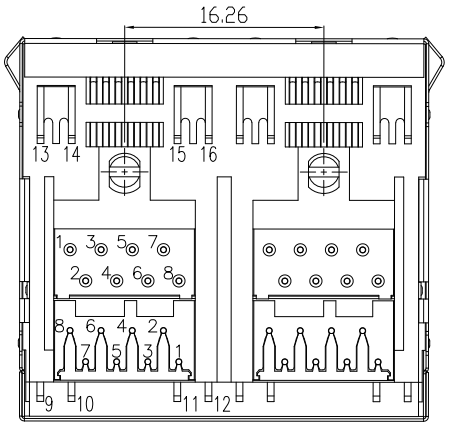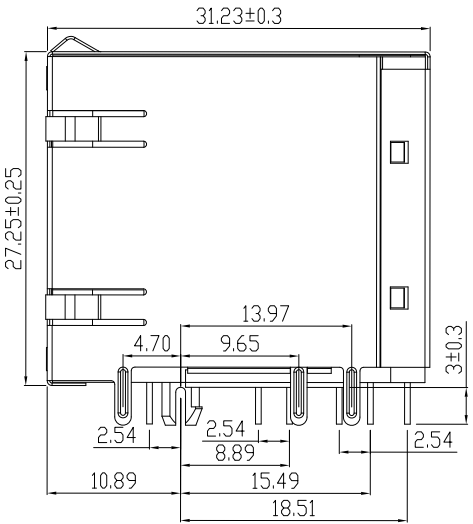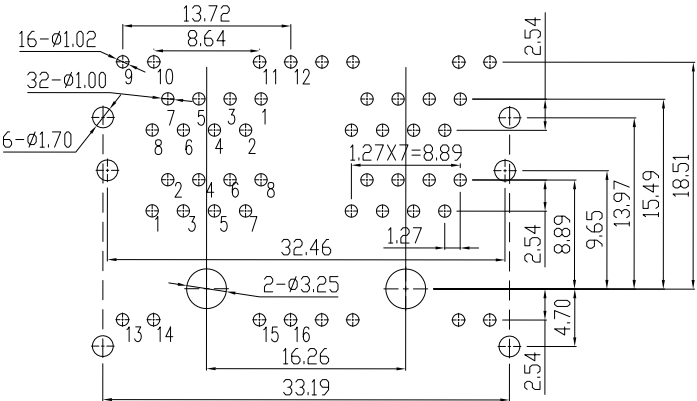

VOOHU 苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd

TITLE: 5921S LED 2X2 8P8C
EMI (正弹) (左绿红右绿红)

PART NO.:
WH59B32887121101

REMARK:


SIZE
A4

SCALE
1:1

SHEET
1/1

UNITS
MM[INCH]

REV
A0



GENERAL TOLERANCES
UNLESS SPECIFIED

x±0.35
.x±0.30
.xx±0.25
.xxx±0.10

APPROVED BY:
Geoffrey.Song

CHECKED BY:
Elvis.Song

DESIGNED BY:
Sunny.Xu

TEL: +86 400 1048 018

WEB: WWW.WOHU-TEK.COM