




1	2	3	4	5	6	7	8		
REACH & RoHS COMPLIANT						REV.	ECN / DESCRIPTION	BY	DATE
						A0	NEW	Sunny.Xu	2018.05.18




TOP VIEW

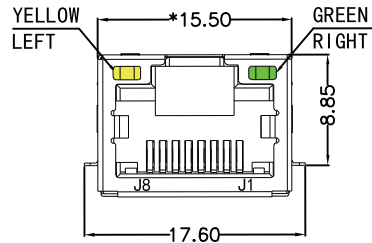


FRONT VIEW

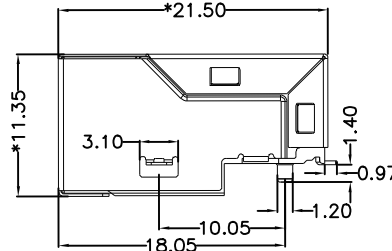

RIGHT SIDE VIEW



BOTTOM VIEW

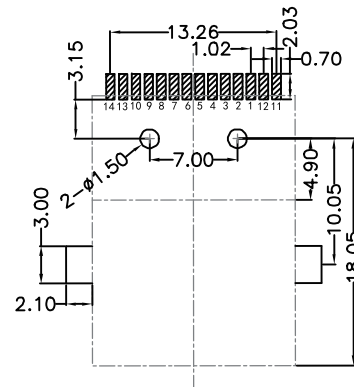


RECOMMENDED PCB LAYOUT
VIEWED FROM COMPONENT SIDE

MATERIAL:

HOUSING: LCP,UL94V-0,BLACK.
TERMINALS BRACKET: LCP,UL94V-0,BLACK.
SHIELD: C2680,T=0.20MM,NICKEL PLATING ON ALL AREA.
TERMINAL: PHOSPHOR BRONZE C5191,T=0.35MM,
6U" GOLD PLATING ON CONTACT AREA.

MECHANICAL:


DURABILITY: 750 CYCLES MIN.
MATING FORCE: 23N MAX.
OPERATING TEMPERATURE: -40°C~+85°C.
STORAGE TEMPERATURE: -40°C~+85°C.
ALL CRITICAL DIMENSIONS WITH "*"

 苏州沃虎电子科技有限公司 Su Zhou Voohu Electronic Tech.Co.Ltd		TITLE: TAB-UP 1X1 10G 贴片	SIZE A4	UNITS MM[INCH]	GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY: Geoffrey.Song	
		PART NO.: SYT211Q744AB1A7CBS1359	SCALE 1:1	REV A0	x±0.35 .x±0.30	x°±3.0° .x°±2.0°	CHECKED BY: Elvis.Song	
TEL: +86 400 1048 018 WEB: WWW.WOHU-TEK.COM		REMARK:	SHEET 1/4		.xx±0.25 .xxx±0.10	.xx°±1.5° .xxx°±1.0°	DESIGNED BY: Sunny.Xu	


1	2	3	4	5	6	7	8	
REACH & RoHS COMPLIANT					REV.	ECN / DESCRIPTION	BY	DATE
					A0	NEW	Sunny.Xu	2018.05.18

Suggested Panel Opening:

Keep-Out Area (Component Side View):

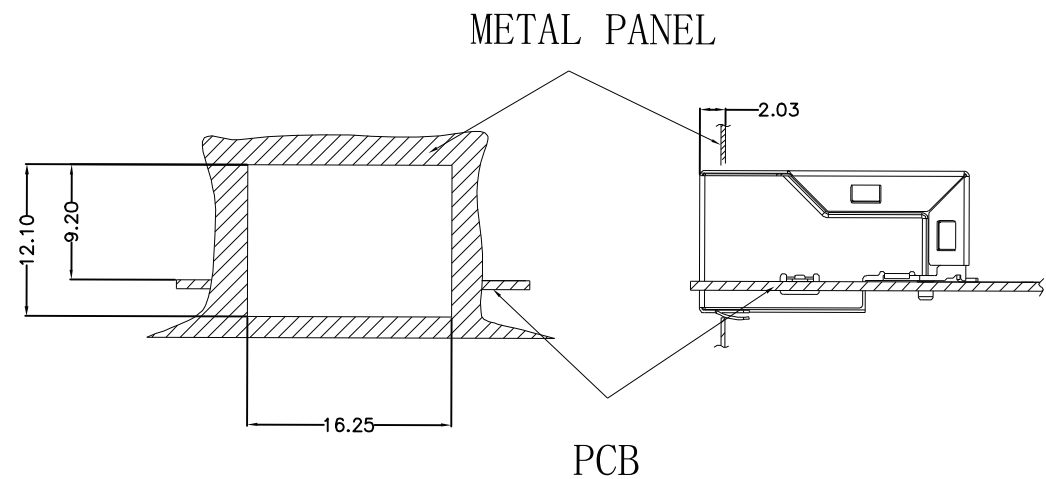



UNIT: mm / inch
Tolerances: ±0.10 / 0.004

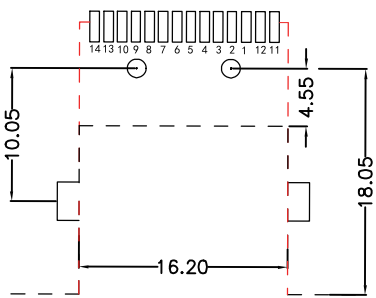


Plug In Side

UNIT: mm / inch
Tolerances: ±0.10 / 0.004


A	 苏州沃虎电子科技有限公司 Su Zhou Voohu Electronic Tech.Co.Ltd		TITLE: TAB-UP 1X1 10G 贴片	SIZE A4	UNITS MM[INCH]	GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY: Geoffrey.Song
			PART NO.: SYT211Q744AB1A7CBS1359	SCALE 1:1	REV A0	.xx±0.35	x°±3.0°	CHECKED BY:
	TEL: +86 400 1048 018 WEB: WWW.WOHU-TEK.COM		REMARK:	SHEET 2/4		.xx±0.30	x°±2.0°	Elvis.Song
						.xx±0.25	.xx°±1.5°	DESIGNED BY:
						.xxx±0.10	.xxx°±1.0°	Sunny.Xu

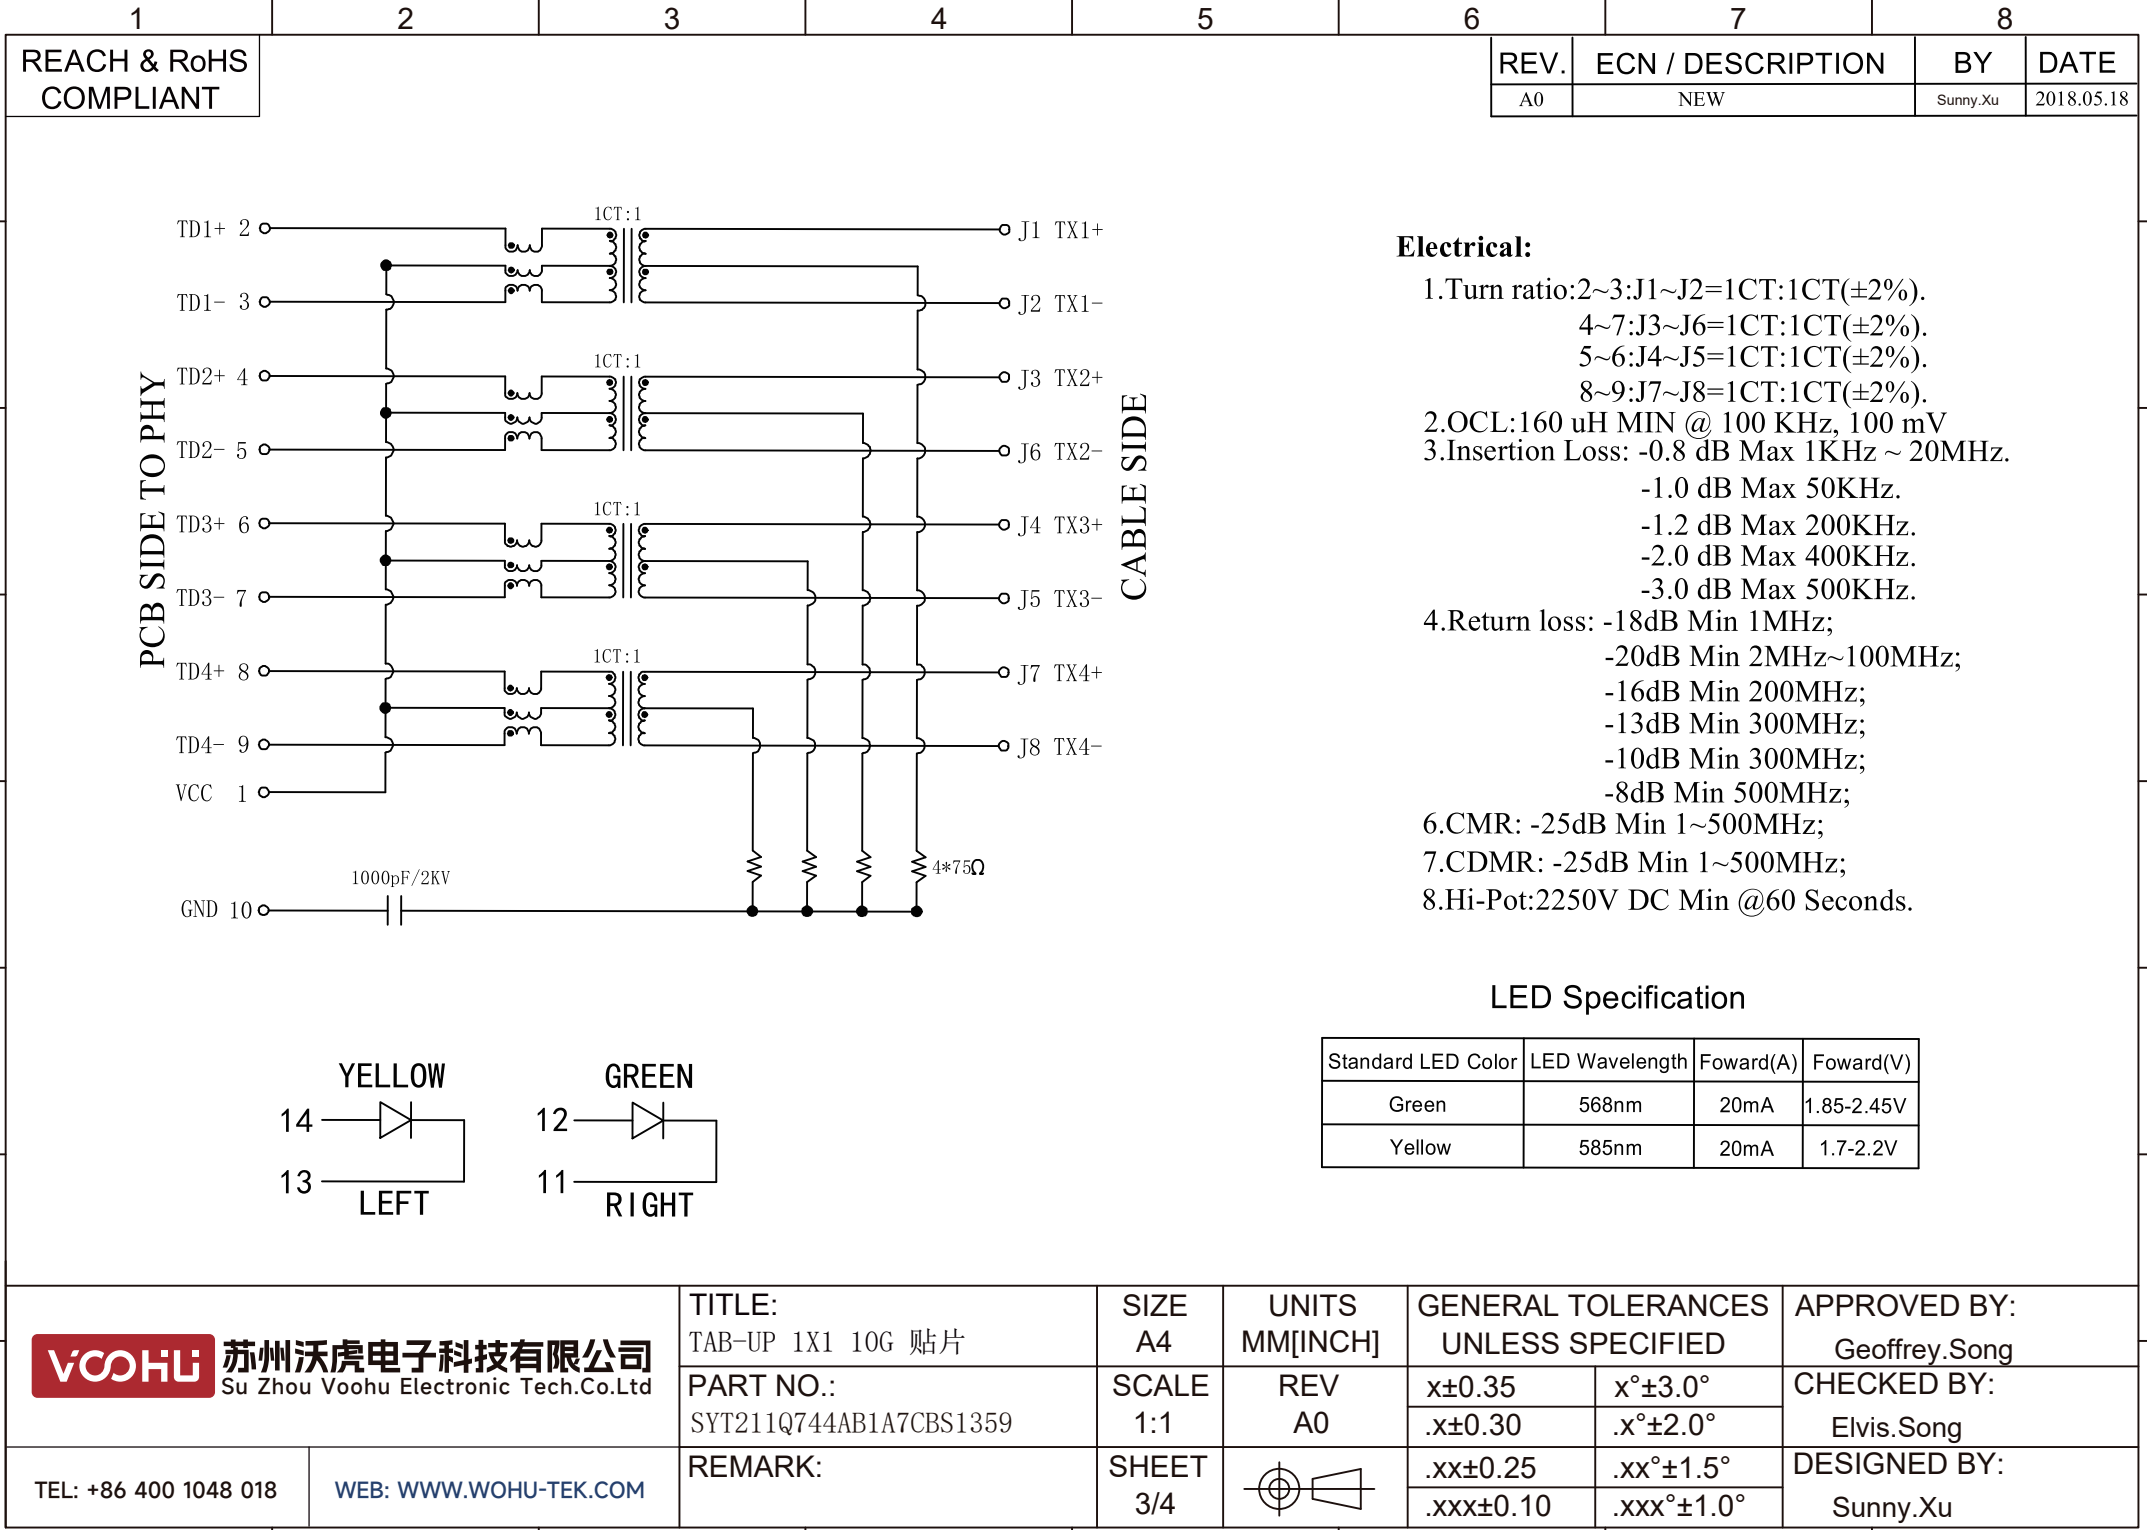

PROFILE OF REFLOW SOLDERING

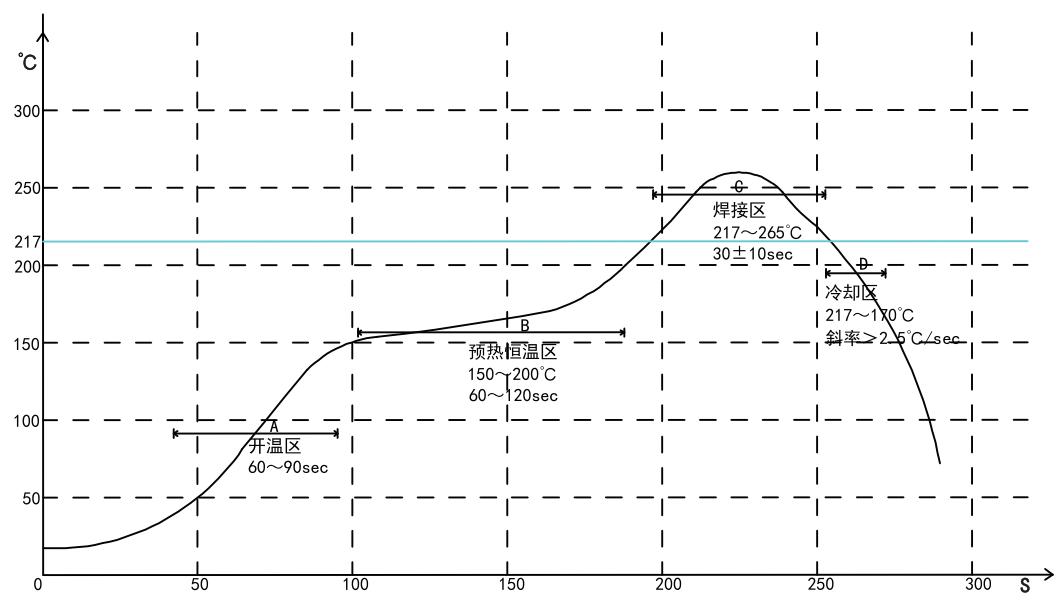

A. Temperature range of open
B. Preheat temperature zone
C. The welding zone
D. The cooling zone
Tip temperature: 265±5°C.
Tip temperature time: 30±10Sec.
Tip melting point of Sn96.5/Ag3/Cu0.5.

A	 苏州沃虎电子科技有限公司 Su Zhou Voohu Electronic Tech.Co.Ltd		TITLE: TAB-UP 1X1 10G 贴片	SIZE A4	UNITS MM[INCH]	GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY: Geoffrey.Song	
			PART NO.: SYT211Q744AB1A7CBS1359	SCALE 1:1	REV A0	.xx±0.35	x°±3.0°	CHECKED BY:	
	TEL: +86 400 1048 018 WEB: WWW.WOHU-TEK.COM		REMARK:	SHEET 4/4		.xx±0.25	.xx°±1.5°	DESIGNED BY:	
						.xxx±0.10	.xxx°±1.0°	Sunny.Xu	