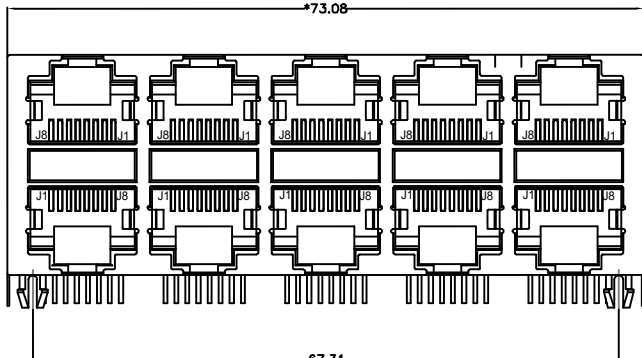
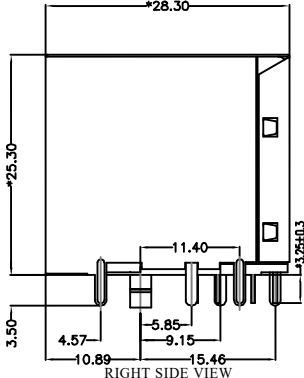
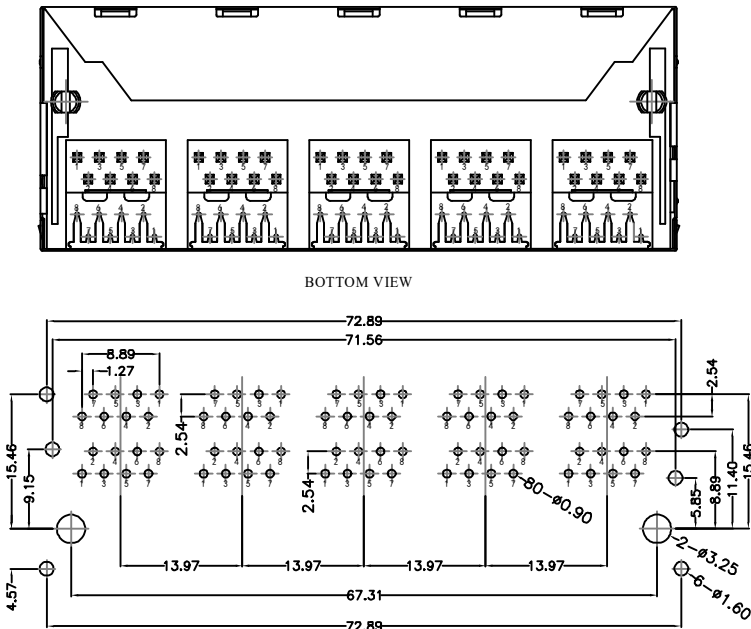
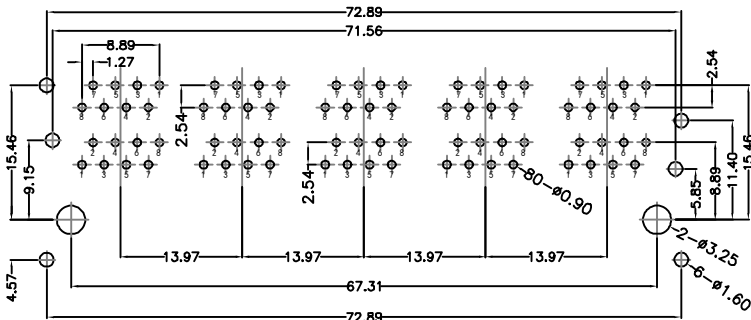


1	2	3	4	5	6	7	8							
REACH & RoHS COMPLIANT						REV.	ECN / DESCRIPTION	BY	DATE					
						A0	NEW	Sunny.Xu	2018.06.22					
 FRONT VIEW					 RIGHT SIDE VIEW					MATERIAL: HOUSING: PBT,UL94V-0,BLACK. TERMINALS BRACKET: PBT,UL94V-0,BLACK. TERMINAL: PHOSPHOR BRONZE Ø=0.46MM, G/FU" GOLD PLATING. SHIELD: C2680,T=0.20MM,20 MIN NICKEL PLATING ON ALL AREA. MACHANICAL: DURABILITY: 750 CYCLES MIN,12.5MM/MINUTE. INSERTION FORCE: 2.2KG.F MAX. RETENTION STRENGTH : 7.7KG.F BETWEEN JACK AND PLUG. OPERATING TEMPERATURE: -40℃~+85℃. STORAGE TEMPERATURE: -40℃~+85℃. ALL CRITICAL DIMENSIONS WITH "MM" ELECTRICAL: VOLTAGE: 125 VOLTS AC. CURRENT RATING : 1.5AMP. DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ,1MIN. INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL AFTER 500V DC FOR 1 MINUTE. CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX. INITIAL 50 MILLIOHMS MAX. AFTER DURABILITY TEST.				
 BOTTOM VIEW					 RECOMMENDED PCB LAYOUT VIEWED FROM COMPONENT SIDE					PCB SIDE TO PHY 1 ○ J1 2 ○ J2 3 ○ J3 4 ○ J4 5 ○ J5 6 ○ J6 7 ○ J7 8 ○ J8 CABLE SIDE				
 苏州沃虎电子科技有限公司 Su Zhou Voohu Electronic Tech.Co.Ltd		TITLE: RJ45 5921 2*5 8P8C			SIZE A4	UNITS MM[INCH]	GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY: Geoffrey.Song					
		PART NO.: SYT59212588GWA1DY1E022短体			SCALE 1:1	REV A0	x±0.35	x°±3.0°	CHECKED BY: Elvis.Song					
		REMARK:			SHEET 1/1		.x±0.30	.x°±2.0°	DESIGNED BY: Sunny.Xu					
TEL: +86 400 1048 018		WEB: WWW.WOHU-TEK.COM					.xx±0.25	.xx°±1.5°						
							.xxx±0.10	.xxx°±1.0°						