


REACH & RoHS
COMPLIANT

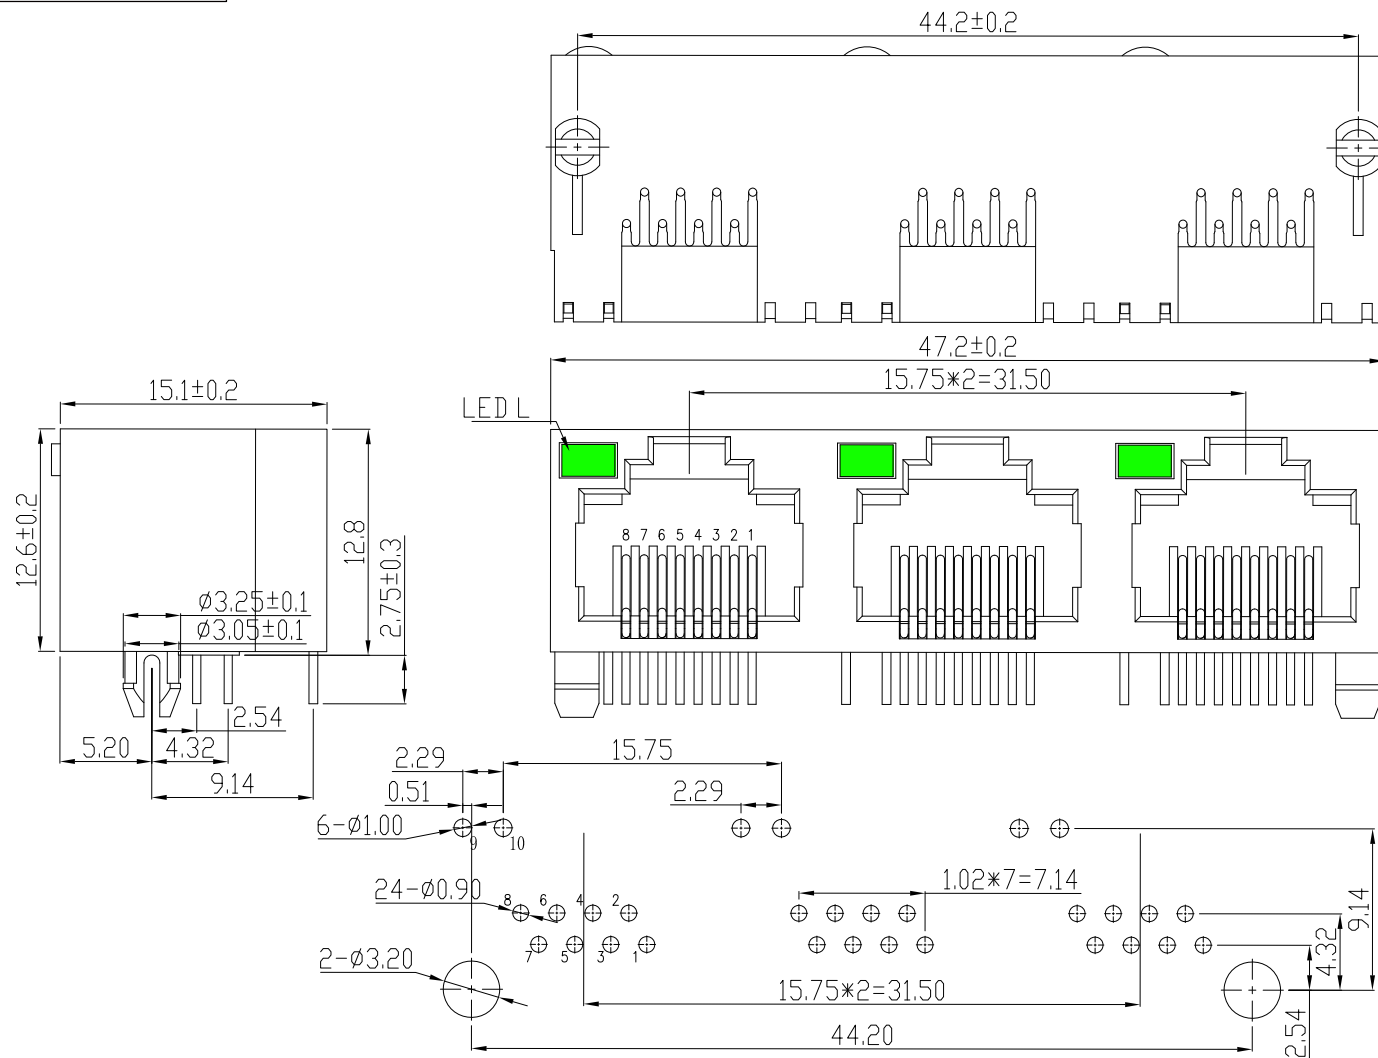

PC Board Layout

NOTES:

ELECTRICAL:

1. VOLTAGE RATING: 125V AC.
2. CURRENT RATING: 1.5A.
3. CONTACT RESISTANCE: 30 m Ω MAX.
4. INSULATION RESISTANCE: 500 M Ω MIN @ 500V DC.
5. DIELECTRIC STRENGTH: 1000V AC 50Hz or 60Hz, 1MIN.


MECHANICAL:

1. INSERT MATERIAL: UL94V-0.
2. CONTACT MATERIAL: Ø0.46mm C51000 (QSn4-0.3) PHOSPHOR BRONZE GOLD PLATING OVER NICKEL.
3. MATING/UNMATING FORCE: 20N Max.
4. RETENTION STRENGTH: 50N pendant $60 \pm 5s$.
5. OPERATING LIFE: 750 CYCLES MIN.

ENVIRONMENTAL:

1. STORAGE: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$ RELATIVE HUMIDITY<70%.
2. OPERATION: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$.

LED L GREEN



SYT56I1388C0111501

CONTACTS (金针根数):

8-8CONTACTS (8C)

LED STYLE(LED 颜色类型):

C-L LED:GREEN,

R LED:W/O LED(左绿右无灯)

PLASTIC(塑料):

1-PBT;

3-NYLON46(尼龙46)

COLOR (颜色): -

1-BLACK(黑色):

5-YELLOE(黄色)

GOLD PLATING(镀金厚度):

1-FU''; 2-1.5U''; 3-3U''; 4-6U'';

5-15U"; 6-30U"; 7-50U"

 苏州沃虎电子科技有限公司 Su Zhou Voohu Electronic Tech.Co.Ltd		TITLE: 56 LED 1X3 8P8C D型(左绿右无灯)黄色	SIZE A4	UNITS MM[INCH]	GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY: Geoffrey.Song
		PART NO.: SYT56I1388C0111501	SCALE 1:1	REV A0	x±0.35	x°±3.0°	CHECKED BY: Elvis.Song
					.x±0.30	.x°±2.0°	
TEL: +86 400 1048 018	WEB: WWW.WOHU-TEK.COM	REMARK:	SHEET 1/1		.xx±0.25	.xx°±1.5°	DESIGNED BY: Sunny.Xu
					.xxx±0.10	.xxx°±1.0°	