

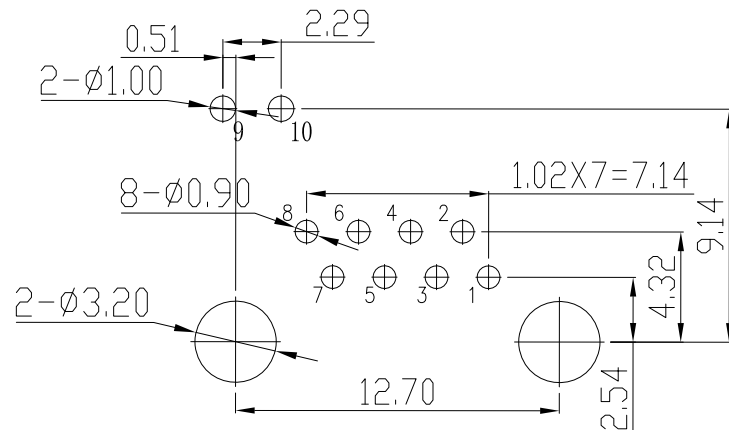


REACH & RoHS
COMPLIANT

LED L GREEN
9  10

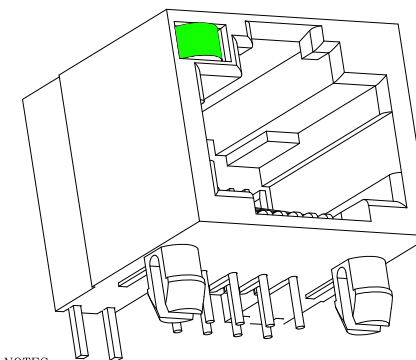

PC Board Layout

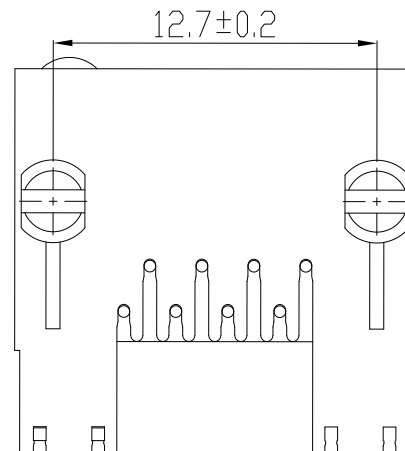


NOTES:

ELECTRICAL:


1. VOLTAGE RATING: 125V AC.
 2. CURRENT RATING: 1.5A.
 3. CONTACT RESISTANCE: 30 mΩ MAX.
 4. INSULATION RESISTANCE: 500 MΩ MIN @ 500V DC.
 5. DIELECTRIC STRENGTH: 1000V AC 50Hz or 60Hz, 1MIN.
- MECHANICAL:
1. INSERT MATERIAL: UL94V-0.
 2. CONTACT MATERIAL: Ø0.46mm C51000(QSn4-0.3)PHOSPHOR BRONZE GOLD PLATING OVER NICKEL.
 3. MATING/UNMATING FORCE: 20N Max.
 4. RETENTION STRENGTH: 50N pendant 60±5s.
 5. OPERATING LIFE: 750 CYCLES MIN.

ENVIRONMENTAL:

1. STORAGE: -40℃ ~ +85℃ RELATIVE HUMIDITY<70%.
2. OPERATION: -40℃ ~ +85℃.

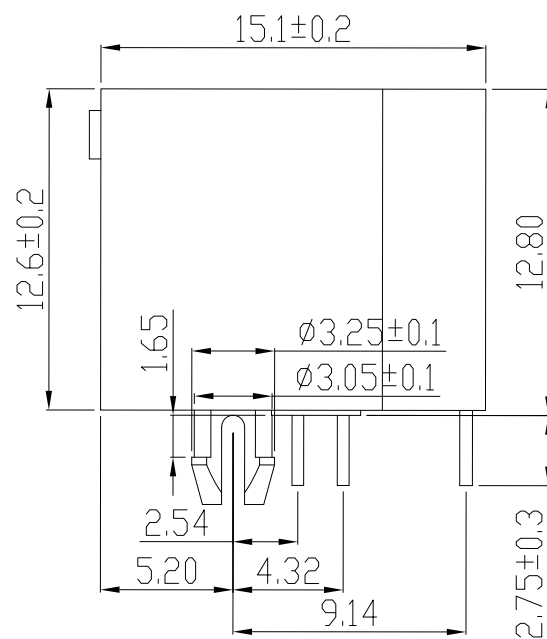

LED L

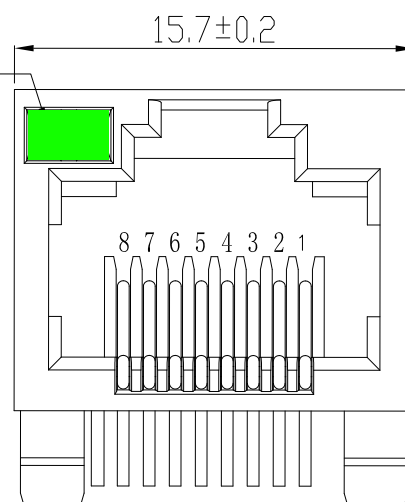

SYT56A1188C011801

CONTACTS (金针根数):

8-8CONTACTS (8C)

LED STYLE (LED 颜色类型):

C-L LED: GREEN,

R LED: W/O LED (左绿右无灯)

PLASTIC (塑料):

1-PBT;

3-NYLON46 (尼龙46)

COLOR (颜色):

1-BLACK (黑色);

8-BLUE (285C 蓝)

GOLD PLATING (镀金厚度):

1-FU"; 2-1.5U"; 3-3U"; 4-6U";

5-15U"; 6-30U"; 7-50U"

VOOHU 苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd

TITLE: 56 LED 1X1 8P8C
(左绿右无灯) 285C 蓝

PART NO.:
SYT56A1188C011801

REMARK:

SIZE
A4

SCALE
1:1

SHEET
1/1

UNITS
MM[INCH]

REV
A0



GENERAL TOLERANCES
UNLESS SPECIFIED

x±0.35
.x±0.30
.xx±0.25
.xxx±0.10

x°±3.0°
.x°±2.0°
.xx°±1.5°
.xxx°±1.0°

APPROVED BY:
Geoffrey.Song

CHECKED BY:
Elvis.Song

DESIGNED BY:
Sunny.Xu

TEL: +86 400 1048 018

WEB: WWW.WOHU-TEK.COM